

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 691 212 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
20.08.1997 Bulletin 1997/34

(51) Int. Cl.⁶: **B41M 5/00**, C08G 18/44,
C08G 18/24

(21) Application number: 95108657.8

(22) Date of filing: 06.06.1995

(54) **Thermal dye transfer receiving element with polycarbonate polyol crosslinked polymer**

Empfangselement für die thermische Farbstoffübertragung, das ein Polycarbonat-polyol vernetztes Polymer enthält

Élément récepteur de colorant pour transfert thermique contenant un polymère réticulé de polycarbonate polyol

(84) Designated Contracting States:
DE FR GB

(30) Priority: 24.06.1994 US 265604

(43) Date of publication of application:
10.01.1996 Bulletin 1996/02

(73) Proprietor: **EASTMAN KODAK COMPANY**
Rochester, New York 14650-2201 (US)

(72) Inventor: **Kung, Teh-Ming**,
c/o Eastman Kodak Company
Rochester, New York 14650-2201 (US)

(74) Representative: **Wibbelmann, Jobst, Dr., Dipl.-Chem.**
Wuesthoff & Wuesthoff,
Patent- und Rechtsanwälte,
Schweigerstrasse 2
81541 München (DE)

(56) References cited:
EP-A- 0 509 149 US-A- 5 266 551

IP 0 691 212 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

This invention relates to dye-receiving elements used in thermal dye transfer, and more particularly, to such elements comprising a crosslinked polycarbonate as a dye-receiving layer.

5 In recent years, thermal transfer systems have been developed to obtain prints from pictures which have been generated electronically from a color video camera. According to one way of obtaining such prints, an electronic picture is first subjected to color separation by color filters. The respective color-separated images are then converted into electrical signals. These signals are then operated on to produce cyan, magenta and yellow electrical signals. These signals are then transmitted to a thermal printer. To obtain the print, a cyan, magenta or yellow dye-donor element is placed
10 face-to-face with a dye-receiving element. The two are then inserted between a thermal printing head and a platen roller. A line-type thermal printing head is used to apply heat from the back of the dye-donor sheet. The thermal printing head has many heating elements and is heated up sequentially in response to one of the cyan, magenta or yellow signals, and the process is then repeated for the other two colors. A color hard copy is thus obtained which corresponds to the original picture viewed on a screen. Further details of this process and an apparatus for carrying it out are contained in U.S. Patent No. 4,621,271, issued November 4, 1986.

Dye donor elements used in thermal dye transfer generally include a support bearing a dye layer comprising heat-transferable dye and a polymeric binder. Dye-receiving elements generally include a support bearing on one side thereof a dye image-receiving layer. The dye image-receiving layer conventionally comprises a polymeric material chosen from a wide assortment of compositions for its compatibility and receptivity for the dyes to be transferred from the
20 dye donor element. The polymeric material must also provide adequate light stability for the transferred dye images. Many of the polymers which provide these desired properties, however, often lack the desired strength and integrity to stand up to the rigors of thermal printing. For example, a significant problem which can be encountered during thermal printing is sticking of the dye donor to the receiver. Gloss and abrasion resistance may also be marginal with many receiving layer polymers.

25 Increasing the hardness of the receiver layer with polymers having higher glass transition temperatures (T_g) can improve physical properties, but penetration of the dye into such layers may be impaired.

An alternate approach to achieve improved film properties is to crosslink the polymer. Crosslinking may be achieved in a variety of different ways, including reaction curing, catalyst curing, heat curing, and radiation curing. In general, a crosslinked polymer receiver layer may be obtained by crosslinking and curing a polymer having a crosslinkable reaction group with an additive likewise having a crosslinkable reaction group, as is discussed in EP-A-394 460. This reference, e.g., discloses receiving layers comprising polyester polyols crosslinked with multifunctional isocyanates. While such crosslinked polyester receiving layers are generally superior in resistance to sticking compared to non-crosslinked polyesters, light stability for transferred image dyes may still be a problem.

U.S. Patent 5,266,551 describes dye-receiving elements based on crosslinked polycarbonate polyol systems which
35 have superior performance in regard to image stability, fingerprint resistance, and other desirable properties. However, a problem has developed with these polymeric systems in that a post-curing step is required to complete the crosslinking reaction which is separate from the film-forming process, i.e., after the coating and drying steps. This required heat-curing step may result in nonuniform crosslinking of the dye-receiving layer due to undesirable heat transfer. Further, curling of the web may take place if the post-curing step is done when the web is rolled up. It is an object of this invention to provide a way in which complete crosslinking of these receiving elements can be achieved during the film-forming process, i.e., during coating and drying of the image-receiving layer itself.

These and other objects are achieved in accordance with this invention which relates to a dye-receiving element for thermal dye transfer comprising a support having on one side thereof a dye image-receiving layer, wherein the dye image-receiving layer comprises a crosslinked polymer network formed by the reaction of multifunctional isocyanates
45 with polycarbonate polyols having two terminal hydroxy groups and an average molecular weight of about 1000 to about 10,000, and wherein dibutyltin diacetate is used as a catalyst in crosslinking said polymer.


In accordance with this invention, it was found that the crosslinking reaction can be substantially accelerated when dibutyltin diacetate, instead of dibutyltin dilaurate as used in the prior art, is used as the catalyst for the reaction of multifunctional isocyanates with polycarbonate polyols, while the superior properties, such as image stability and fingerprint resistance, of the resulting image-receiving layer are still obtained.

50 Any amount of dibutyltin diacetate catalyst can be used which is effective for the intended purpose. In general, good results have been obtained when dibutyltin diacetate is used in an amount of from about 0.5 to about 4% by weight, based on the weight of the isocyanate.

Another embodiment of the invention relates to a process of preparing a dye-receiving element comprising coating
55 a support with a dye image-receiving layer coating comprising a mixture of multifunctional isocyanates and polycarbonate polyols having at least two terminal hydroxy groups and an average molecular weight of about 1000 to about 10,000 in the presence of a dibutyltin diacetate catalyst, and then drying the receiving layer to form a crosslinked polymer network.

The crosslinked polymer network formed by the reaction of multifunctional isocyanates with polycarbonate polyols

may be represented by the following formula:

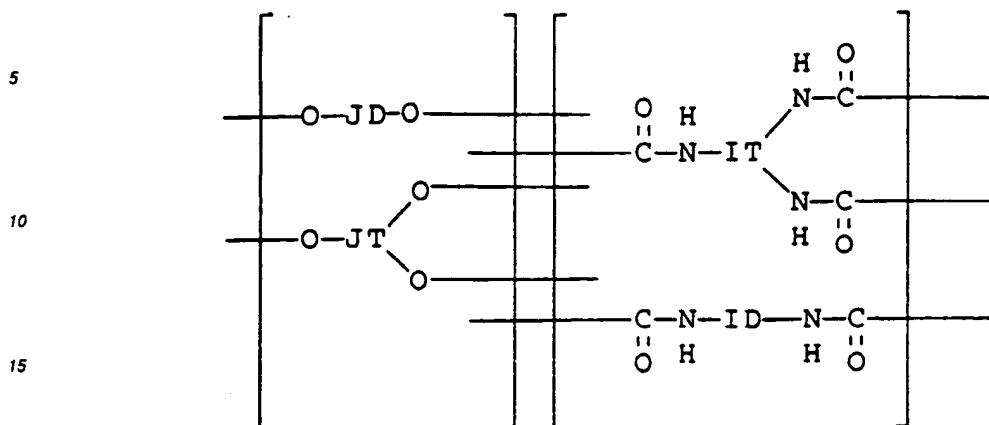


20 where JD and JT together represent from 50 to 100 mol% polycarbonate segments derived from polycarbonate polyols having an average molecular weight of from about 1000 to about 10,000, and ID and IT represent aliphatic, cycloaliphatic, araliphatic, or aromatic radicals of multifunctional isocyanate units.

JD represents polycarbonate segments derived from difunctional polycarbonate polyols, i.e., polycarbonate polyols having only two terminal hydroxy groups. JT represents polycarbonate segments derived from tri- and higher functional polycarbonate polyols, i.e., polycarbonate polyols having additional hydroxy groups in addition to two terminal hydroxy groups. A combination of different polycarbonate segments JD and JT of similar or different molecular weights may be used. Optionally, up to a combined 50 mol% of JD and JT may represent segments derived from polyols having a molecular weight of less than about 1000, including monomeric diols (e.g., bisphenol A bis(hydroxyethyl) ether) and triols (e.g., glycerol) or higher functional polyols (e.g., pentaerythritol). The monomeric diols provide short linkages between the isocyanate monomers and are sometimes referred to as "hard segments".


IT represents the radical of a multifunctional isocyanate containing at least three isocyanate groups, such as Desmodur N-3300® (Miles Inc.), which is 1,3,5-tris(6-isocyanatoethyl)-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione, having a CAS Registration Number 3779-63-3. Higher functionality isocyanates, such as polydisperse extensions of monomeric isocyanates may also be used to create additional crosslinks. ID represents the radical of a difunctional isocyanate, such as hexamethylene diisocyanate, which may be included to extend the network without creating additional crosslinks. Preferably, at least 10 mol%, more preferably at least 50 mol%, of the isocyanate units are at least trifunctional.

Polycarbonate polyols may be represented by the following general formula:




where R and R' may be the same or different and represent divalent aliphatic or aromatic radicals. The polycarbonate polyols may be formed by the reaction of a bis(chloroformate) with a diol. One of the monomers is used in excess to limit and control the molecular weight of the resulting polycarbonate polyol. As shown in the figure below, the diol is in excess and becomes the end group. Alternatively, the bis(chloroformate) could be in excess to give a chloroformate-terminated oligomer which is then hydrolyzed to form a hydroxyl end group. Therefore, polyols can be prepared from these monomers with either R or R' in excess.


General Polycarbonate
Polymerization Reaction

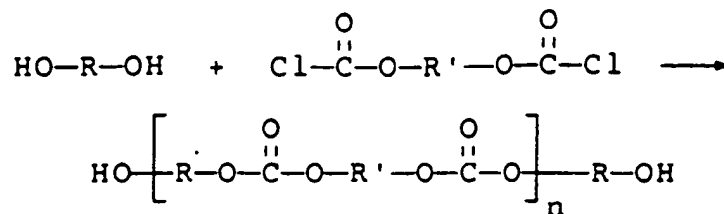

Examples of bis(chloroformates) which can be used include diethylene glycol bis(chloroformate), butanediol bis(chloroformate), and bisphenol A bis(chloroformate).

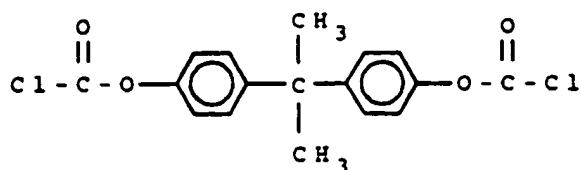

Bisphenol A bis(chloroformate)




Diethylene glycol bis(chloroformate)




Butanediol bis(chloroformate)


Examples of diols which can be used are bisphenol A, diethylene glycol, butanediol, pentanediol, nonanediol, 4,4'-bicyclo(2,2,2)hept-2-ylidenebisphenol, 4,4'-(octahydro-4,7-methano-5H-inden-5-ylidene) bisphenol, and 2,2',6,6'-tetrachlorobisphenol A.

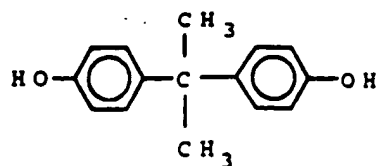


Bisphenol A

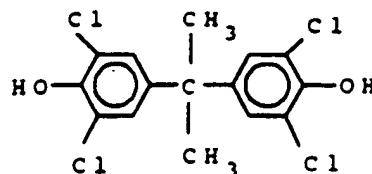

2,2',6,6'-Tetrachlorobisphenol A




4,4'-(Octahydro-4,7-methano-5H-inden-5-ylidene)bisphenol



4,4'-Bicyclo(2,2,2)hept-2-ylidenebisphenol

The above monomers and other aliphatic and aromatic diols may be combined to form a variety of compositions, chain lengths and end groups. The polyol could have terminal aliphatic hydroxyl groups (e.g., diethylene glycol ends) or phenolic terminal groups (e.g., bisphenol A ends). One such structure based on bisphenol A and diethylene glycol with aliphatic hydroxyl end groups is as follows.

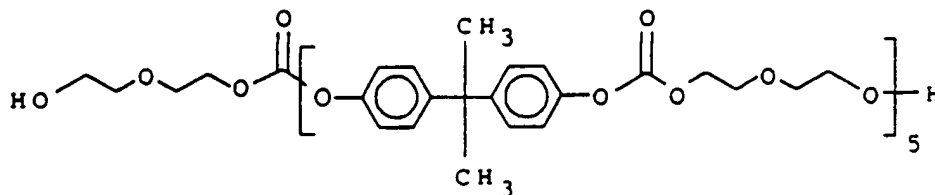

The chain length shown is 5 which would give a molecular weight of 2,040. A reasonable working range is from about 1000 to about 10,000, more preferably from about 1000 to about 5,000. Polyols of shorter chain length, or the monomers themselves, may also be incorporated into the crosslinked network.

The polycarbonate polyol is then formulated with a multifunctional isocyanate such as Desmodur N-3300® to give a crosslinked network of the general structure shown. The reaction catalyst dibutyltin diacetate is then used to facilitate the crosslinking reaction.

The support for the dye-receiving element of the invention may be a polymeric paper, a synthetic paper, or a cellulosic paper support, or laminates thereof. In a preferred embodiment, a paper support is used. In a further preferred embodiment, a polymeric layer is present between the paper support and the dye image-receiving layer. For example, there may be employed a polyolefin such as polyethylene or polypropylene. In a further preferred embodiment, white pigments such as titanium dioxide, zinc oxide, etc., may be added to the polymeric layer to provide reflectivity. In addition, a subbing layer may be used over this polymeric layer in order to improve adhesion to the dye image-receiving layer. Such subbing layers are disclosed in U.S. Patent Nos. 4,748,150, 4,965,238, 4,965,239, and 4,965,241. The receiver element may also include a backing layer such as those disclosed in U.S. Pat. Nos. 5,011,814 and 5,096,875.

The invention polymers may be used in a receiving layer alone or in combination with other receiving layer polymers. Receiving layer polymers which may be used with the polymers of the invention include polycarbonates, polyurethanes, polyesters, poly(vinyl chloride), poly(styrene-co-acrylonitrile), poly(caprolactone) or any other receiver polymer and mixtures thereof.

The dye image-receiving layer may be present in any amount which is effective for its intended purpose. In general, good results have been obtained at a receiver layer concentration of from about 0.5 to about 10 g/m².

While the receiving layer of the invention comprising a crosslinked polymer network formed by the reaction of mul-

tifunctional isocyanates with polycarbonate polyols inherently provides resistance to sticking during thermal printing, sticking resistance may be even further enhanced by the addition of release agents to the dye receiving layer, such as silicone-based compounds, as is conventional in the art.

5 Dye-donor elements that are used with the dye-receiving element of the invention conventionally comprise a support having thereon a dye-containing layer. Any dye can be used in the dye-donor employed in the invention provided it is transferable to the dye-receiving layer by the action of heat. Especially good results have been obtained with sublimable dyes. Dye-donors applicable for use in the present invention are described, e.g., in U.S. Patent Nos. 4,916,112, 4,927,803 and 5,023,228.

10 As noted above, dye-donor elements are used to form a dye transfer image. Such a process comprises imagewise-heating a dye-donor element and transferring a dye image to a dye-receiving element as described above to form the dye transfer image.

In a preferred embodiment of the invention, a dye-donor element is employed which comprises a poly(ethylene terephthalate) support coated with sequential repeating areas of cyan, magenta and yellow dye, and the dye transfer steps are sequentially performed for each color to obtain a three-color dye transfer image. Of course, when the process is only performed for a single color, then a monochrome dye transfer image is obtained.

15 Thermal printing heads which can be used to transfer dye from dye-donor elements to the receiving elements of the invention are available commercially. Alternatively, other known sources of energy for thermal dye transfer may be used, such as lasers as described in, for example, GB-A-2,083,726.

The following examples are provided to further illustrate the invention.

20 Structures of some of the materials used in the experiments detailed in Example 1 through 3 below are shown here:

25

30


35

40

45


50

55

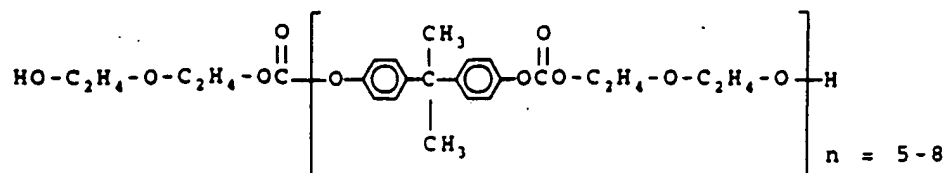


POL = polycarbonate polyol

+

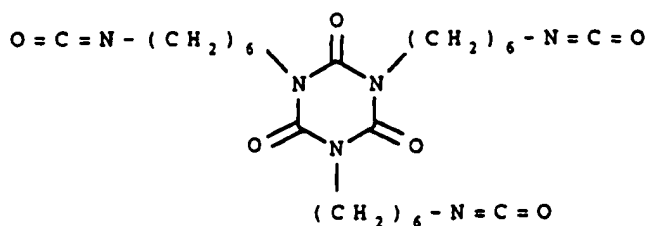

Desmodur N-3300®

crosslinking catalyst

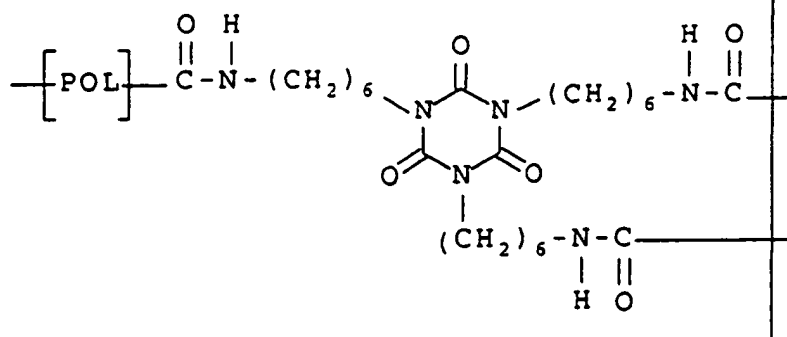

POL crosslinked with Desmodur N-3300®

Example 1- Comparison of Catalysts

Two sample solutions of approximately 15 g each in a separate glass vial were prepared by dissolving POL and Desmodur N-3300® in ethyl acetate at an OH/NCO equivalent weight ratio of 0.75:1. The solutions were stirred and catalysts added: Metacure T-1® (dibutyltin diacetate, Air Products Corp.) was added to one sample, and Metacure T-12® (dibutyltin dilaurate, Air Products Corp.) was added to the other sample in amounts of 1.1 wt-% and 2 wt-% of the total added polyisocyanate so that both catalysts could be compared on an equimolar basis. Clear ethyl acetate solutions with a total solid content of approximately 27 wt-% were obtained. After brief stirring, the solutions in their respective glass vials with lids on were subjected to a gel time evaluation at 20°C and 50% RH (relative humidity) with the following results:

TABLE 1

Element	Components	Total Solid wt-%	Gel Time, (min.)
Control	POL	77.7	220±10
	Desmodur N-3300®	21.9	
	Dibutyltin dilaurate	0.4	
E-1	POL	77.83	120±10
	Desmodur N-3300®	21.93	
	Dibutyltin diacetate	0.24	

The above results show that a longer gel time was obtained for the control which indicates a less efficient catalyst for this particular crosslinking system.

Example 2

Two separate sample solutions of approximately 20 g each were prepared in two glass vials by mixing POL and Desmodur N-3300® as described in Example 1. However, this time diphenyl phthalate (DPP) and Fluorad FC-431® fluorinated surfactant (3M Corp.) were added to the samples prior to addition of the respective catalysts again in the amount of 1.1 wt-% and 2 wt-% of total added polyisocyanate so that the catalysts could be compared on an equimolar basis. Both samples were again conditioned at 20°C and 50% RH to evaluate gel times with the following results:

TABLE 2

Element	Components	Total Solid wt-%	Gel Time, (min.)
Control	POL	68.3	270
	Desmodur N-3300®	19.2	
	Dibutyltin dilaurate	0.4	
	DPP	11.9	
	FC-431	0.2	
E-2	POL	68.4	195
	Desmodur N-3300®	19.3	
	Dibutyltin diacetate	0.2	
	DPP	11.9	
	FC-431	0.2	

The above results again show that a longer gel time was obtained for the control which indicates a less efficient catalyst for this particular crosslinking system.

Example 3

Two sample solutions were prepared as described in Example 2. The clear solutions had total solid contents of approximately 18 wt-% each. After brief stirring to assure uniform mixing, the solutions were immediately hopper-coated on a receiver support in sequence at a traveling speed of 7.62 m/min. and a drying temperature of 98.9°C. The total residence time of coated receiver in the drying sections of the coating machine was about 6 min. The catalyst was added immediately before the solution was queued up for its coating run.

A dye donor element of sequential areas of cyan, magenta, and yellow dye was prepared and used for printing the above-prepared receiver samples as described in detail in U.S. Patent No. 5,272,378, col. 6 line 42 through col. 8 line

28..The coated receiver samples were cut into sample pieces of 10.2 cm X 14 cm size and printed with a patched color pattern of 11 gradations (Fresh). The receivers were then incubated for four days at 60°C (Incubated).

The difference in optical density between room-set and cured receivers served as measure for the completeness of the crosslinking reaction achieved for the coated receiver during the coating and drying process. The larger this difference was found to be, the more incomplete was the crosslinking reaction, thereby leaving a greater uncrosslinked fraction of species in the matrix of the coated receiver. The following results were obtained:

TABLE 3


SAMPLE	CONDITIONS	OPTICAL DENSITY			
		Step 5	Step 7	Step 9	Step 11
Control-3	Fresh	1.09	1.67	2.12	2.51
(yellow)	Incubated	0.97	1.48	1.97	2.38
	Difference (%)	11	11.3	7.10	5.20
E-3	Fresh	1.07	1.65	2.10	2.51
(yellow)	Incubated	1.00	1.59	2.03	2.45
	Difference (%)	6.50	3.60	3.30	2.40
Control-3	Fresh	1.11	1.69	2.10	2.59
(magenta)	Incubated	1.04	1.55	1.96	2.45
	Difference (%)	6.30	8.30	6.70	5.40
E-3	Fresh	1.08	1.61	2.05	2.53
(magenta)	Incubated	1.06	1.59	2.01	2.47
	Difference (%)	1.90	1.20	2.00	2.40
Control-3	Fresh	1.02	1.51	1.85	2.29
(cyan)	Incubated	0.94	1.39	1.68	2.01
	Difference (%)	7.80	7.90	9.20	12.2
E-3	Fresh	1	1.45	1.78	2.16
(cyan)	Incubated	0.96	1.42	1.72	2.06
	Difference (%)	4	2.10	3.40	4.60

The above results show that samples E-3 using dibutyltin diacetate as a catalyst have a significantly lower difference in the optical density values obtained as a result of the transfer of all three colors (yellow, magenta, cyan) before and after incubation compared to the differences when dibutyltin dilaurate was used as catalyst.

45 Claims

1. A dye-receiving element for thermal dye transfer comprising a support having on one side thereof a dye image-receiving layer, wherein said dye image-receiving layer comprises a crosslinked polymer network formed by the reaction of multifunctional isocyanates with polycarbonate polyols having at least two terminal hydroxy groups and an average molecular weight of 1000 to 10,000, and wherein dibutyltin diacetate is used as a catalyst in crosslinking said polymer.

2. The element of claim 1 wherein said crosslinked polymer network has the formula:

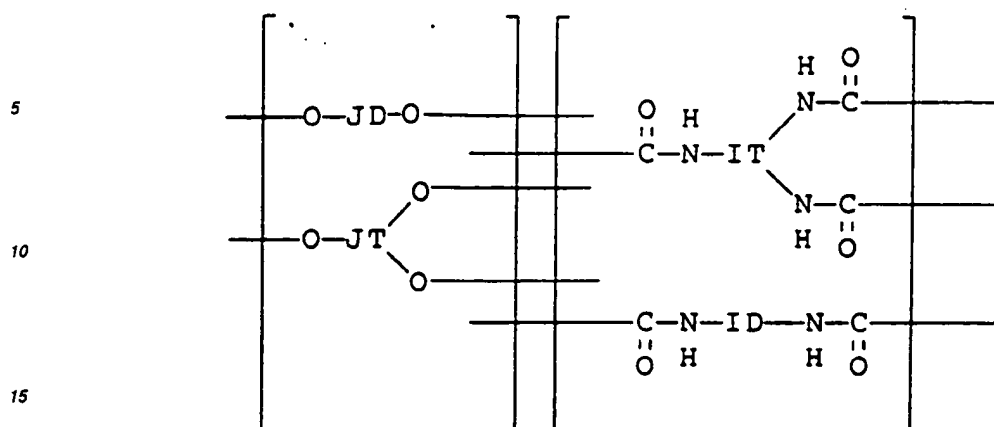

wherein

20

JD and JT together represent from 50 to 100 mol% polycarbonate segments derived from polycarbonate polyols having an average molecular weight of from 1000 to 10,000 and from 0 to 50 mol% segments derived from polyols having a molecular weight of less than 1000, and
ID and IT represent aliphatic, cycloaliphatic, araliphatic, or aromatic radicals of multifunctional isocyanate units.

25

3. The element of claim 1 wherein said polycarbonate polyols comprise bisphenol A derived units and diethylene glycol derived units.

30

4. The element of claim 1 wherein the terminal hydroxy groups of the polycarbonate polyols comprise aliphatic hydroxyl groups.

5. The element of claim 1 wherein the terminal hydroxy groups of the polycarbonate polyols comprise phenolic groups.

35

6. The element of claim 1 wherein the terminal hydroxy groups of the polycarbonate polyols comprise a mixture of phenolic groups and aliphatic hydroxyl groups.

7. The element of claim 1 wherein at least 50 mol% of the multifunctional isocyanates are at least trifunctional.

40

8. The element of claim 1 wherein said polyols and multifunctional isocyanates are reacted to form the crosslinked polymer network in amounts such that the equivalents of polyol hydroxyl groups are from 60 to 100% of the equivalents of isocyanate groups.

45

9. The element of claim 1 wherein said dibutyltin diacetate is used at an amount of from 0.5 to 4% by weight, based on the weight of said isocyanate.

50


10. A process of preparing a dye-receiving element comprising coating a support with a dye image-receiving layer coating comprising a mixture of multifunctional isocyanates and polycarbonate polyols having two terminal hydroxy groups and an average molecular weight of 1000 to 10,000 in the presence of a dibutyltin diacetate catalyst, and then drying said receiving layer to form a crosslinked polymer network.

Patentansprüche

55

1. Farbstoff-Empfangelement für die thermische Farbstoffübertragung mit einem Träger, auf dessen einer Seite sich eine Farbbild-Empfangsschicht befindet, wobei die Farbbild-Empfangsschicht ein quervernetztes Polymer Netzwerk aufweist, gebildet durch Umsetzung von multifunktionellen Isocyanaten mit Polycarbonat-Polyolen mit mindestens zwei endständigen Hydroxygruppen und einem mittleren Molekulargewicht von 1000 bis 10000, und wobei Dibutylzinndiacetat als Katalysator für die Quervernetzung des Polymeren verwendet wird.

2. Element nach Anspruch 1, in dem das quervernetzte Polymernetzwerk die Formel hat:

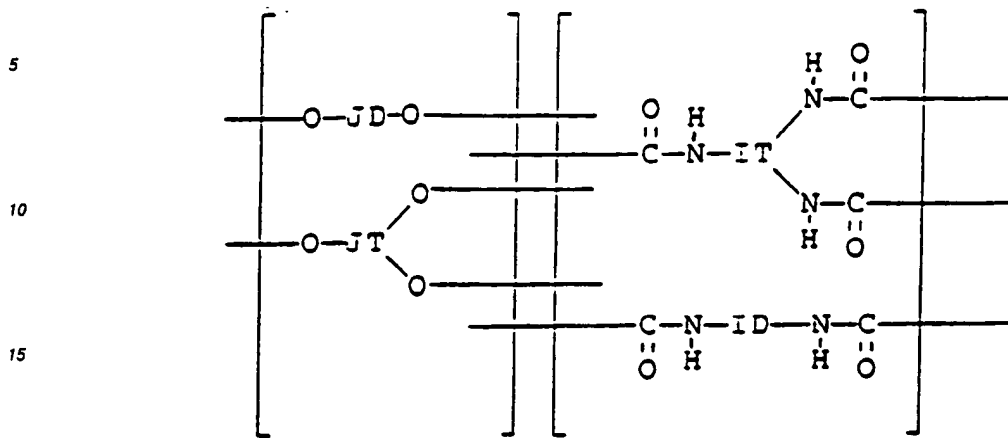

20

worin bedeuten:

25 JD und JT stellen zusammen 50 bis 100 Mol-% Polycarbonat-Segmente dar, die sich von Polycarbonat-Polyolen mit einem mittleren Molekulargewicht von 1000 bis 10000 ableiten und 0 bis 50 Mol-% Segmente, die sich von Polyolen mit einem Molekulargewicht von weniger als 1000 ableiten, und ID und IT stellen aliphatische, cycloaliphatische, araliphatische oder aromatische Reste von multifunktionellen Isocyanateinheiten dar.


- 30 3. Element nach Anspruch 1, in dem die Polycarbonat-Polyole Einheiten umfassen, die sich von Bisphenol-A ableiten und Einheiten, die sich von Diethylenglykol ableiten.
4. Element nach Anspruch 1, in dem die endständigen Hydroxygruppen der Polycarbonat-Polyole aliphatische Hydroxylgruppen aufweisen.
- 35 5. Element nach Anspruch 1, in dem die endständigen Hydroxygruppen der Polycarbonat-Polyole phenolische Gruppen aufweisen.
6. Element nach Anspruch 1, in dem die endständigen Hydroxygruppen der Polycarbonat-Polyole eine Mischung aus phenolischen Gruppen und aliphatischen Hydroxylgruppen aufweisen.
- 40 7. Element nach Anspruch 1, in dem mindestens 50 Mol-% der multifunktionellen Isocyanate mindestens trifunktionell sind.
8. Element nach Anspruch 1, in dem die Polyole und multifunktionellen Isocyanate unter Bildung des quervernetzten Polymernetzwerkes in Mengen umgesetzt werden derart, daß die Äquivalente von Polyolhydroxylgruppen bei 60 bis 100 % der Äquivalente der Isocyanatgruppen liegen.
- 45 9. Element nach Anspruch 1, in dem das Dibutylzinndiacetat in einer Menge von 0,5 bis 4 Gew.-%, bezogen auf das Gewicht des Isocyanates, verwendet wird.
- 50 10. Verfahren zur Herstellung eines Farbstoff-Empfangselementes, bei dem man einen Träger mit einer Beschichtung für eine Farbbild-Empfangsschicht beschichtet, die umfaßt eine Mischung aus multifunktionellen Isocyanaten und Polycarbonat-Polyolen mit zwei endständigen Hydroxygruppen und einem mittleren Molekulargewicht von 1000 bis 10000 in Gegenwart eines Dibutylzinndiacetat-Katalysators, worauf die Empfangsschicht unter Ausbildung eines quervernetzten Polymernetzwerkes getrocknet wird.
- 55

Revendications

1. Élément récepteur de colorant pour transfert thermique de colorant comprenant un support dont l'une des faces

est recouverte d'une couche réceptrice d'image de colorant, dans lequel ladite couche réceptrice d'image de colorant comprend un réseau polymère réticulé formé par la réaction d'isocyanates multifonctionnels avec des polycarbonates polyols ayant au moins deux groupes hydroxy terminaux et présentant un poids moléculaire moyen compris entre 1000 et 10 000, et dans lequel le diacétate de dibutylétain est utilisé comme catalyseur pour la réticulation dudit polymère.

2. Elément selon la revendication 1, dans lequel ledit réseau polymère réticulé répond à la formule suivante :

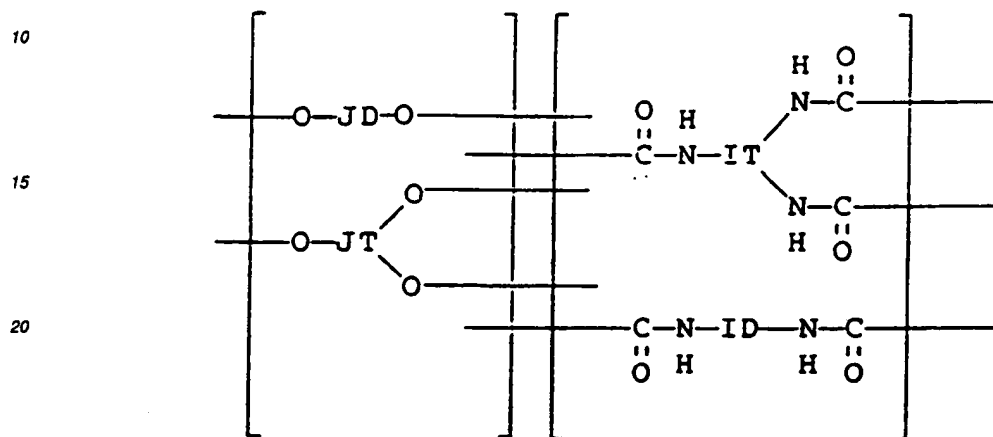

où

JD et JT représentent ensemble 50 à 100 % en moles des segments de polycarbonate provenant de polycarbonates polyols ayant un poids moléculaire moyen compris entre 1000 et 10 000 et 0 à 50 % en moles des segments provenant de polyols ayant un poids moléculaire inférieur à 1000, et ID et IT représentent des radicaux aliphatiques, cycloaliphatiques, araliphatiques ou aromatiques d'unités isocyanates multifonctionnelles.

3. Elément selon la revendication 1, dans lequel lesdits polycarbonates polyols comprennent des unités dérivées du bisphénol A et des unités dérivées du diéthylène glycol.
4. Elément selon la revendication 1, dans lequel les groupes hydroxy terminaux des polycarbonates polyols comprennent des groupes hydroxyles aliphatiques.
5. Elément selon la revendication 1, dans lequel les groupes hydroxy terminaux des polycarbonates polyols comprennent des groupes phénoliques.
6. Elément selon la revendication 1, dans lequel les groupes hydroxy terminaux des polycarbonates polyols comprennent un mélange de groupes phénoliques et de groupes hydroxyles aliphatiques.
7. Elément selon la revendication 1, dans lequel au moins 50 % en moles des isocyanates multifonctionnels sont au moins trifonctionnels.
8. Elément selon la revendication 1, dans lequel lesdits polyols et isocyanates multifonctionnels sont mis à réagir pour former le réseau polymère réticulé, à des concentrations telles que les équivalents des groupes polyols hydroxyles correspondent à 60 à 100 % des équivalents des groupes isocyanates.
9. Elément selon la revendication 1, dans lequel ledit diacétate de dibutylétain est utilisé à une concentration comprise entre 0,5 et 4 % en poids, basé sur le poids dudit isocyanate.
10. Procédé de préparation d'un élément récepteur de colorant comprenant l'application, sur un support, d'une couche réceptrice d'image de colorant comprenant un mélange d'isocyanates multifonctionnels et de polycarbonates polyols ayant deux groupes hydroxy terminaux et présentant un poids moléculaire moyen compris entre 1000 et 10

000, en présence d'un catalyseur à base de diacétate de dibutylétain, puis le séchage de ladite couche réceptrice pour former un réseau polymère réticulé.

5

10

15

20

25

30

35

40

45

50

55